


# Pt100 Screw-in Sensor 7138

## Features


- Resistance RTD Pt100 class B
- 2- or 4-wire connection
- Process thread M6
- Protection tube and protection spring stainless steel
- Cable type flexible fibreglass insulation with steel wire brading

Order code: 7138 -  1. -  2. -  3. -  4. -  5.


1. **Number of elements** (1 or 2 elements)
2. **Type of connection**  
 2L 2-wire connection  
 4L 4-wire connection (only 1 element)
3. **Cable length [mm]**
4. **Max. operating temperature[°C]**
5. **Other features on request**



2-Leiter



4-Leiter

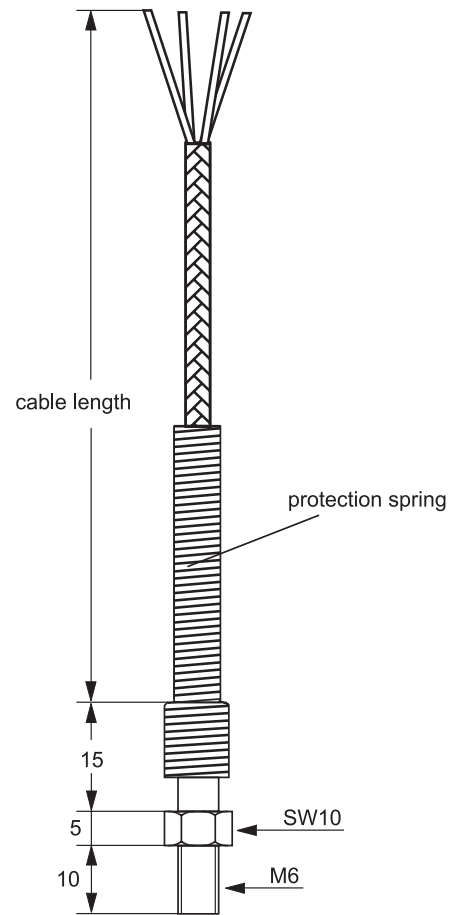

## Stock

## Type

7138 - 1 - 4L - 2000 - 400°C