


Pt100 temperature sensor 8101/A

Features

- RTD Pt100 class B, fast response
2-wire; 3-wire application possible
- Protection sheath stainless steel 1.4571
- Measuring area with smaller sheath
- Terminal head type B, DIN 43729
- Protection IP 54,
optional IP65 (only terminal head type BKV)
- Process thread G 1/2A SW 19

Order Code: 8101/A - 1. - 2. - 3. - 4. - 5. - 6.

1. Number of Pt100 elements (1 or 2)
2. Protection sheath reduced 9 to 6mm \varnothing
3. Installation length [mm]
4. Terminal head
 - BK type B (standard) element replaceable (IP54)
 - BKV type B with sealed-in cable gland (IP65)
5. Max. operating temperature[°C]
6. Other features on request

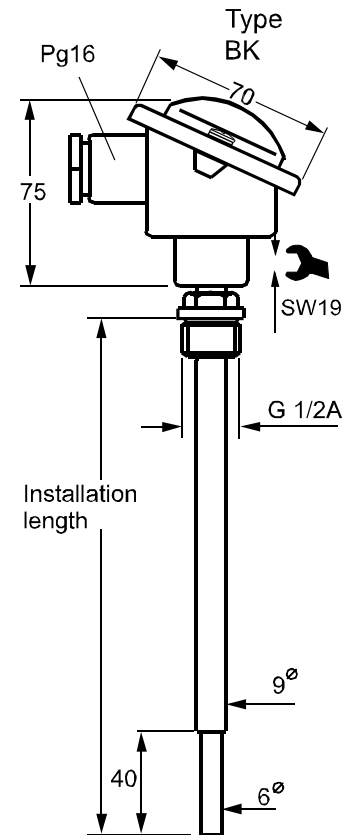

Stock

Type

8101/A - 1 - 6 - 160 - G1/2A - BK - 500°C
 8101/A - 1 - 6 - 250 - G1/2A - BK - 500°C
 8101/A - 1 - 6 - 400 - G1/2A - BK - 500°C
 8101/A - 1 - 6 - 600 - G1/2A - BK - 500°C
 8101/A - 2 - 6 - 250 - G1/2A - BK - 500°C